



The Coolest Book **About Us**



An experience of more than five decades, with expertise in connecting innovation to comfort, has enabled Polar to create an empire of hassle-free living for generations. With a versatile range of fans designed with ground-breaking technology and elegance, Polar has successfully made a mark in multiple sectors, including homes, offices and other commercial spaces. What makes Polar stand apart is its ceaseless performance and seamless service. Today millions of homes in India are powered with the privilege of ultimate comfort promised by Polar.



BEAT THE HEAT WITH THE COOLEST OPTIONS

Want to save energy?

Best options are on pages

O1

1.4

Looking for a premium upgrade?

Choose from pages

15

28

If performance is all you care about,

ideal options are on pages

Want to tackle heat smartly?


Choose from pages

 69_{---- 108

Small space?

Ideal options are on pages

109_____

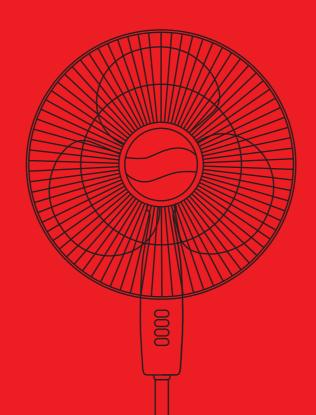

If you want odourless indoors,

choose from pages

119 ______

Make large spaces comfortable

with options from pages

POWER





TECHNICAL
SPECIFICATIONS

Sweep	Power Input	Speed	Air Delivery	Service Value in CMM/Watts
in mm	in Watts	in RPM	in CMM	
1200	32*	350	220	6.9

*with light – 38 W

Features



Powerful 100% copper BLDC motor with 60% power savings



3-tone LED underlight (Warm, Natural & Cool) with adjustable brightness



RF remote for convenient control from anywhere in the room



Aerodynamically designed unique blades for high air thrust



Reverse rotation for warm air circulation in winters

- Sleep-well timer with auto shut-off (up to 8 hours)
- Wide operational voltage with fluctuation protection (150 V to 260 V)
- Booster mode for maximum airflow









*New Arrival

TECHNICAL SPECIFICATIONS

Sweep	Power Input	Speed	Air Delivery	Service Value in CMM/Watts
in mm	in Watts	in RPM	in CMM	
900	31	500	170	5.5
1200	32	350	225	7

Features



Powerful 100% copper BLDC motor with 60% power savings



Remote controller for speed regulation



Sleep-well timer with auto shut-off (up to 8 hours)



Booster mode for maximum air-flow



Sleek design with LED indicator



Reverse rotation for warm air circulation in winters

- Wide operational voltage with fluctuation protection (150 V to 260 V)
- Aerodynamic & slim design for higher air delivery









TECHNICAL
SPECIFICATIONS

Sweep	Power Input	Speed	Air Delivery	Service Value in CMM/Watts
in mm	in Watts	in RPM	in CMM	
900	31	500	170	5.5
1200	32	350	225	7

Features



Powerful BLDC motor with 60% power savings



Remote controller for speed regulation



Superior powder -coated paint for long-lasting attractive finish



Booster mode for maximum airflow



Sleek design with LED indicator



Reverse rotation for warm air circulation in winters

- Wide operational voltage with fluctuation protection (150 V to 260 V)
- Aerodynamic & slim design for modern homes
- shut-off (up to 8 hours)









Features



BLDC motor with 65% power savings



High-performance long-life motor



Aluminium blades for excellent air delivery



RF remote for convenient control from anywhere in the room

 Wide operational voltage with fluctuation protection (150 V to 260 V)



TECHNICAL SPECIFICATIONS

Sweep in mm

Power Input in Watts 26 Speed in RPM 350 Air Delivery in CMM

Service Value in CMM/Watts

8



Features



BLDC motor with 65% power savings



High-performance long-life motor



Aerodynamically designed ribbed blades for high air thrust



Speed control through capacitor-type step regulator

 Wide operational voltage with fluctuation protection (150 V to 260 V)



TECHNICAL SPECIFICATIONS

Sweep
in mmPower Input
in WattsSpeed
in RPMAir Delivery
in CMM120026350210

Service Value in CMM/Watts

8



Features



BLDC motor with 60% power savings



220 CMM for high air delivery



Remote controller for speed regulation



Wider blade tips for high air thrust and spread

 Wide operational voltage with fluctuation protection (150 V to 260 V)




TECHNICAL SPECIFICATIONS

Sweep in mm 1200 Power Input in Watts 32 Speed in RPM 350 Air Delivery in CMM Service Value in CMM/Watts

6.8

LUXURIOUS

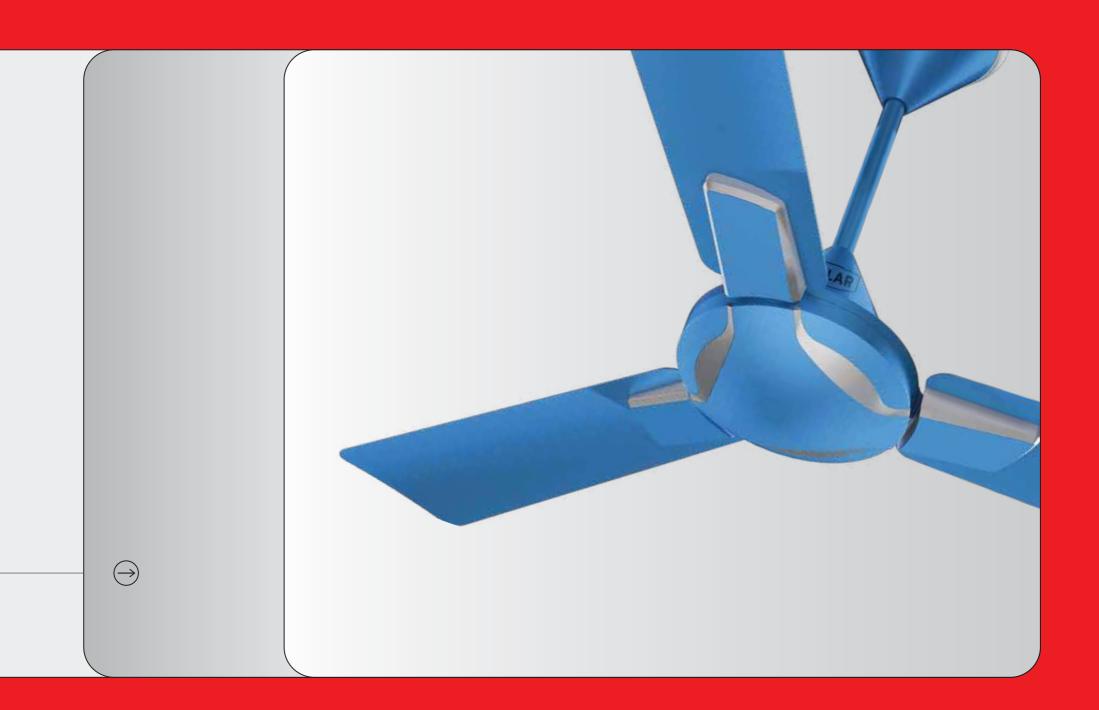





Features



Powerful & energy-efficient 100% copper motor



225 CMM for wider air spread & high thrust



Wide range of lustrous metallic paints to suit every style



Wide aluminium blades for high air delivery



Anti-dust coating to ensure minimal dust deposition & easy cleaning

• Contemporary designer fans that are energy-efficient



TECHNICAL SPECIFICATIONS

Sweep in mm Power Input in Watts

1200 53

Speed in RPM 360 Air Delivery in CMM Service Value in CMM/Watts

PEARL IVORY-METALLIC BROWN

CORVETTE ANTI-DUST

POLAR

Energy-saving Fan





Features



Energy-efficient motor with excellent design for optimum low voltage operation



220 CMM for wider air spread and high thrust



Wider blade tips for high air thrust and spread



Annular deco ring on motor periphery complements modern home décor

- Anti-dust coating to ensure minimal dust deposition and easy cleaning
- Metallic paint with multi-colour options complements modern luxurious homes



TECHNICAL SPECIFICATIONS

Sweep in mm Power Input in Watts 53 Speed in RPM 360 Air Delivery in CMM Service Value in CMM/Watts





Features



Powder coated to ensure long-lasting attractive finish



220 CMM for wider air spread and high thrust



Wider blades for high air thrust and spread



Contemporary design for modern homes

- Annular deco ring on motor periphery
- Energy-efficient motor with optimum design for high air delivery




TECHNICAL SPECIFICATIONS Sweep in mm 1200

Power Input in Watts 53

Speed Air Delivery in RPM in CMM 360 220

Service Value in CMM/Watts

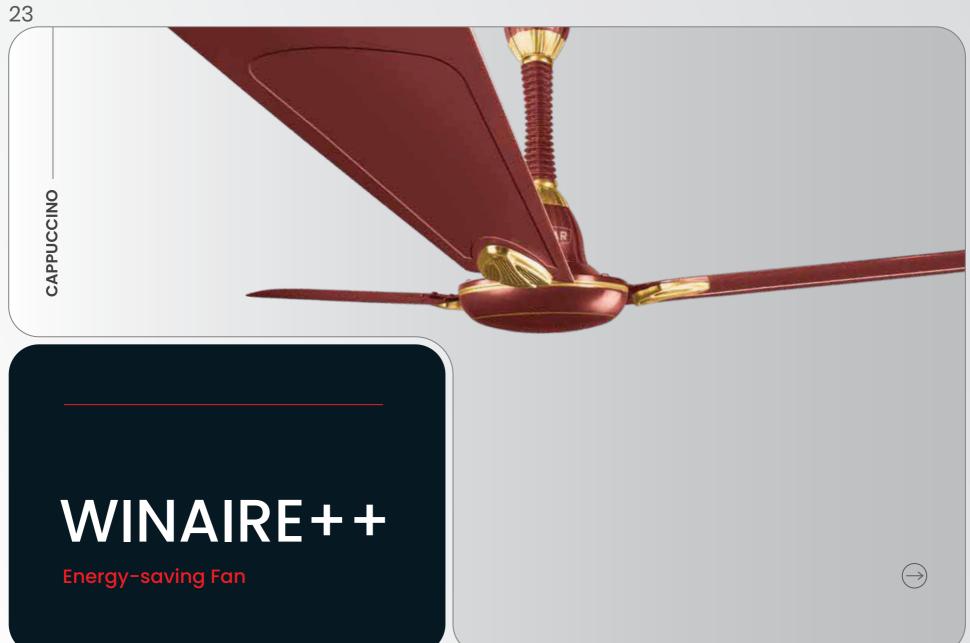



Features



Powerful & energy-efficient motor with 100% copper winding



30% wider blade tips for higher speed



Classic and elegant design complements home décor

 Metallic paint finish with lacquer coating for longer life

TECHNICAL SPECIFICATIONS

Sweep in mm Power Input in Watts

1200 53

Speed in RPM Air Delivery in CMM Service Value in CMM/Watts







Features



220 CMM for high air delivery



Powerful and energy-efficient motor with 100% copper winding



Wide aluminium blades for high air spread and thrust

- Anti-dust coating ensures minimal dust deposition and keeps the fan stain-free
- Metallic paint finish



TECHNICAL SPECIFICATIONS Sweep in mm 1200

Power Input in Watts 53

Speed in RPM 360

Air Delivery in CMM 220

Service Value in CMM/Watts 4.2



Features



Powerful and energy-efficient 100% copper motor



Wide aluminium blades for high air thrust

 Aesthetically designed decorative ring and blade trims




TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM	Service Value in CMM/Watts
900	45	450	140	3.1
1200	55	360	220	4.0

CEASELESS



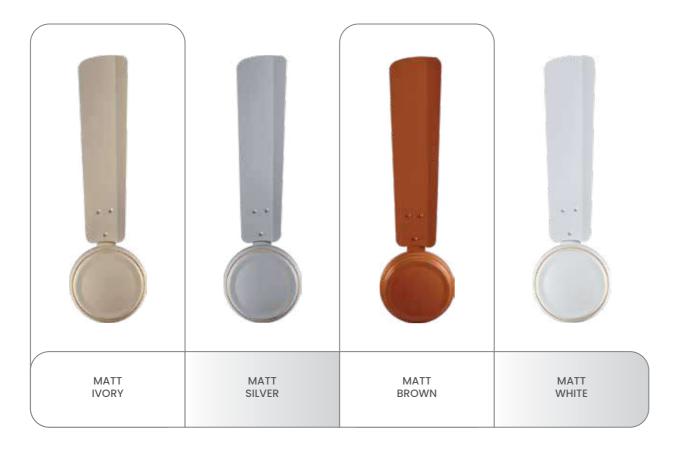

Features



220 CMM for high air delivery



Powerful and energy-efficient motor with 100% copper winding



Wider blade tips for excellent air delivery and thrust

• Minimalist design for modern homes



TECHNICAL SPECIFICATIONS

Power Input Sweep in mm in Watts 53 1200

Speed in RPM 360

Air Delivery in CMM 220

4.15





Features



Powerful and energy-efficient motor with 100% copper winding



Wide aluminium blades for high air thrust



Deco model with super elegant two-part blade trims

• All-time favourite fan



TECHNICAL SPECIFICATIONS

Power Input Sweep in mm in Watts 55 1200

Speed Air Delivery in RPM in CMM 360 220



Features



Powerful and energy-efficient 100% copper motor



Wide and aerodynamically designed blades for high air thrust

 Aesthetically designed decorative ring and blade trims




TECHNICAL SPECIFICATIONS

Sweep in mm Power Input in Watts

1200 52

Speed in RPM 360 Air Delivery in CMM Service Value in CMM/Watts

4.0

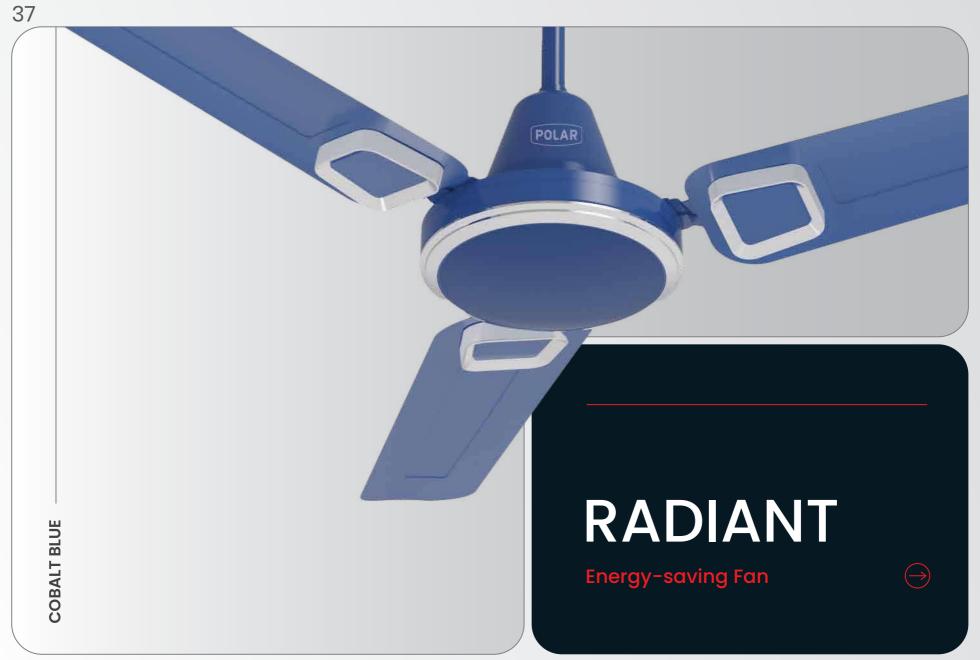



Features



Powerful and energy-efficient motor with 100% copper winding



Unique ribbed blades for high air thrust



Decorative annular motor ring and contemporary blade trims

 Refreshing design in a wide range of colours



TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM	Service Value in CMM/Watts
900	40	425	132	3.3
1200	52	360	210	4.0



Features



Powerful & energy-efficient motor



Powder-coated finish for longer life



Aerodynamically designed ribbed blades for high air thrust

• Attractive colour range to elevate the style quotient of any home



TECHNICAL SPECIFICATIONS

Sweep in mm 1200

Power Input in Watts 52

Speed in RPM 360

Air Delivery in CMM 210





Features



Powerful & energy-efficient motor



Unique ribbed blades for high air thrust



Decorative annular motor ring and contemporary blade trims

• Wide range of colours for stylish & modern homes



TECHNICAL SPECIFICATIONS

Sweep in mm

Power Input in Watts Speed in RPM 360 Air Delivery in CMM Service Value in CMM/Watts

4.0





LIGHT BLUE-SILVER

CHAMPAGNE

TECHNICAL SPECIFICATIONS

Sweep
in mmPower Input
in WattsSpeed
in RPMAir Delivery
in CMMService Value
in CMM/Watts1200504002104.2

Features



Powerful and energy-efficient motor with 100% copper winding



Aerodynamically designed ribbed blades for high air thrust



High-speed with 400 RPM

 Two-tone metallic finish with bellow and bellow ring







Features



Powerful and energy-efficient motor



Wide and aerodynamically designed blades for high air thrust



Powder-coated finish for longer life

- Robust fan with excellent performance
- Aesthetically designed decorative blade trims & showcap



TECHNICAL SPECIFICATIONS Sweep in mm 1200

Power Input in Watts 52

Speed in RPM 360

Air Delivery in CMM 210



Features



Powerful motor with 100% copper winding



Aerodynamically designed wide blades for high air thrust


• Robust fan with excellent performance



TECHNICAL SPECIFICATIONS

Power Input in Watts Sweep in mm 52 1200

Speed Air Delivery in CMM in RPM 360 210

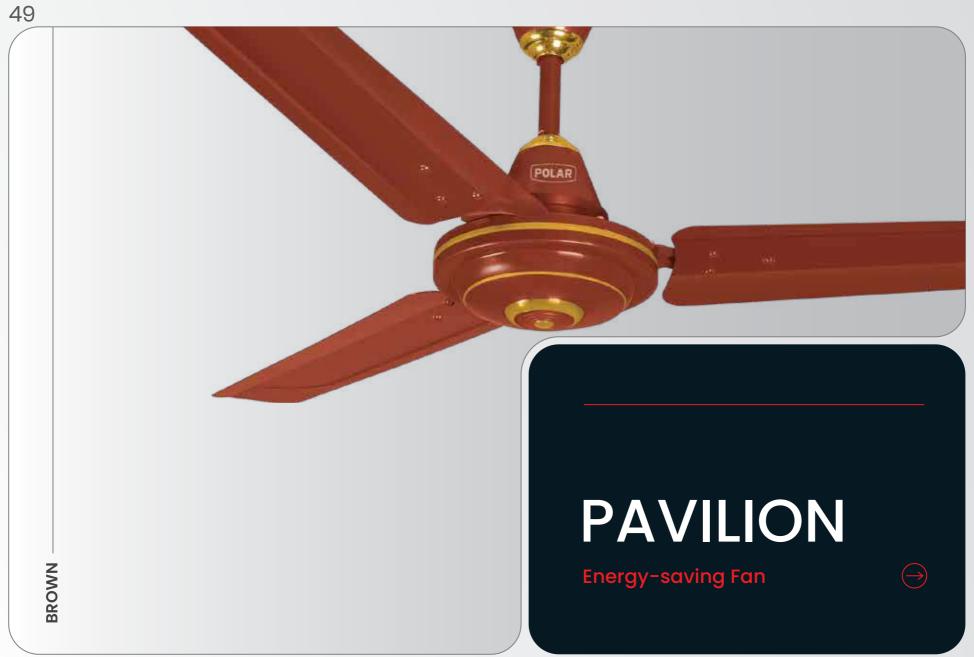



Sweep Power Input Speed Air Delivery in mm in Watts in RPM in CMM

52

Features



Powerful and energy-efficient motor



Aerodynamically designed broad ribbed blades for high air thrust



Elegant look with high performance



TECHNICAL SPECIFICATIONS

Sweep in mm

Speed in RPM 360 Air Delivery in CMM 210

4.0



Features



Powerful and energy-efficient motor



Aerodynamically designed ribbed blades for high air thrust

• Powder-coated finish for longer life




TECHNICAL SPECIFICATIONS

Sweep
in mmPower Input
in WattsSpeed
in RPM120052360

Air Delivery in CMM

4.0

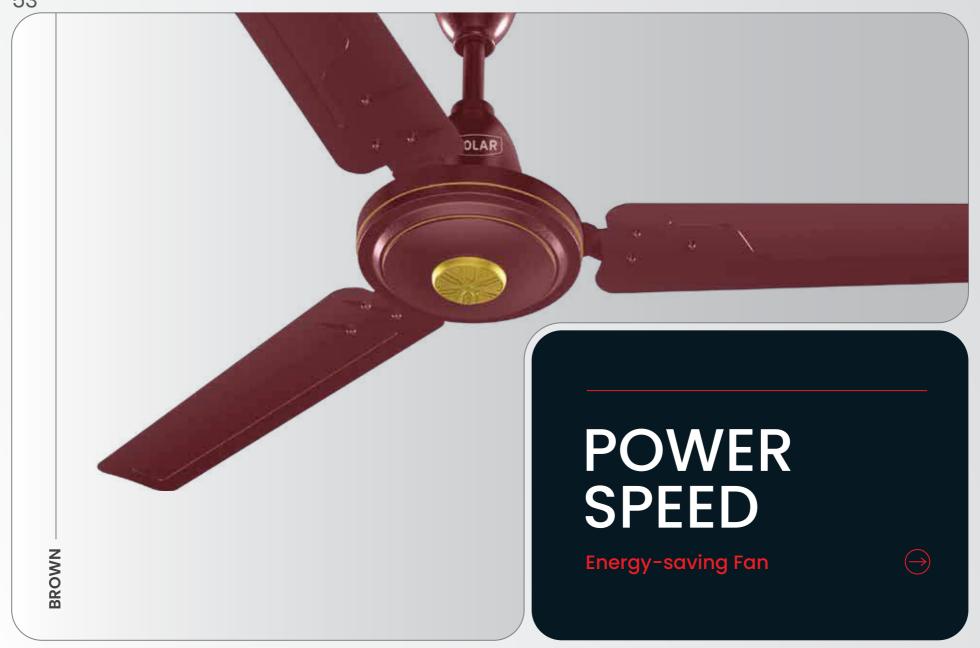



Features



Powerful and energy-efficient motor with 100% copper winding



Scientifically ribbed blades for high air delivery and durability



High-speed with 400 RPM



Powder-coated finish for longer life

TECHNICAL SPECIFICATIONS

Sweep in mm

ep Power Input in Watts
0 52

Speed in RPM 400 Air Delivery in CMM





TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM	Service Value in CMM/Watts
900	40	425	132	3.3
1200	52	400	210	4.0

Features



Powerful and energy-efficient motor with 100% copper winding



Aerodynamically designed ribbed blades for high air thrust



High-speed with 400 RPM











BROWN (DECO & BASE MODEL)

IVORY (DECO & BASE MODEL)

WHITE (DECO & BASE MODEL)







SMOKE BROWN (DECO & BASE MODEL)



BROWN (600 MM)

TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM	Service Value in CMM/Watts
600	70	850	105	1.5
900	40	425	132	3.3
1200	52	400	210	4.0
1400	60	310	252	4.2

Features



Powerful and energy-efficient motor with 100% copper winding



Scientifically ribbed blades for high air delivery and durability

- Powder-coated finish for longer life
- Deco model with two-part decorative blade trims for an enhanced look (available in 900 mm and 1200 mm sweep)





Features



Powerful and energy-efficient motor



Aerodynamically designed ribbed blades for high air thrust

• Powder-coated finish for longer life



Sweep	Power Input	Speed	Air Delivery	Service Value in CMM/Watts
in mm	in Watts	in RPM	in CMM	
1200	50	360	210	4.2







TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM	Service Value in CMM/Watts
600	70	850	105	1.5
900	40	425	132	3.3
1200	52	400	210	4.0

Features



Powerful and energy-efficient motor



Aerodynamically designed ribbed blades for high air thrust

 Powder-coated finish for longer life





Features



400 RPM and 1200 mm sweep for high speed



Powerful & energy-efficient motor delivers cool air & consumes less power



Wide aluminium blades for high air thrust

• Powder-coated finish for a premium look



TECHNICAL SPECIFICATIONS

Sweep in mm Power Input in Watts Speed in RPM 1200 50 400

Air Delivery in CMM







Features



600 RPM for super high speed



Powerful and energy-efficient motor

• Powder-coated finish for longer life




TECHNICAL SPECIFICATIONS

Power Input in Watts Sweep in mm 55 900

Speed in RPM 600

Air Delivery in CMM 172

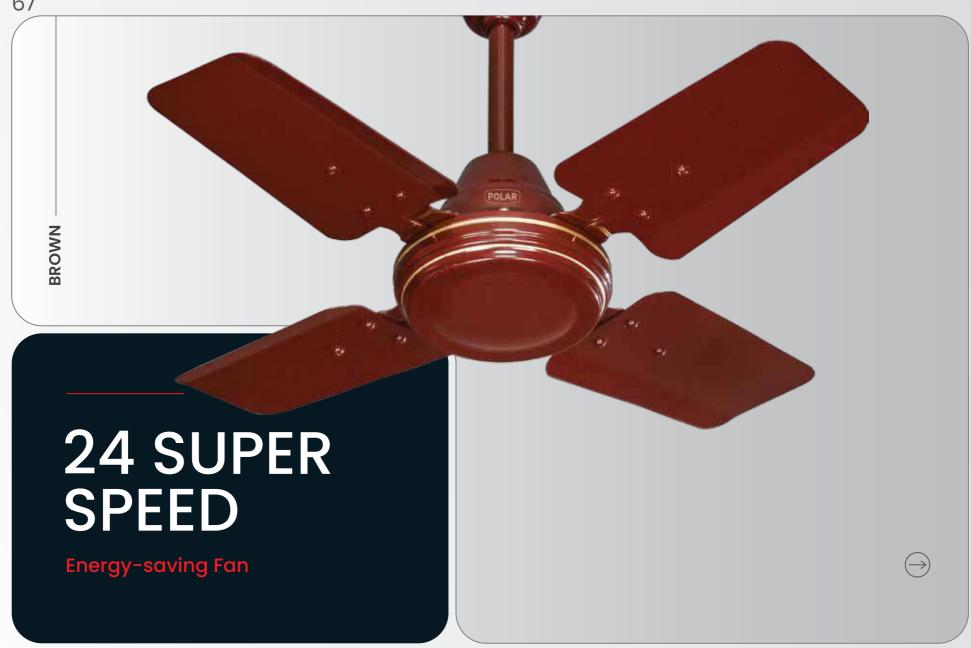



Features



850 RPM for super high speed



Powerful and energy-efficient motor with 100% copper winding



Superior powder-coated paint finish for longer life

- Four-bladed fan with high air thrust
- Ideal for small spaces like Puja Rooms, Bathrooms, Kitchens, Cabins, Shops, etc.



TECHNICAL SPECIFICATIONS

Sweep in mm 600

Power Input in Watts Speed in RPM 850 Air Delivery in CMM Service Value in CMM/Watts

1.5



EXCEPTIONALLY INDICATION OF THE PROPERTY OF TH





ANTIQUE BRONZE

TECHNICAL SPECIFICATIONS

Sweep	Power Input	Speed	Air Delivery
in mm	in Watts	in RPM	in CMM
400	65	1350	72

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection device for motor



Smooth 90-degree oscillation



Strong and large metal base for better stability



Aerodynamically designed 4-leaf aluminium blades for higher air thrust & delivery



3-level speed control rotary switch

- Telescopic arrangement for height adjustment
- Lucrative smooth bronze finish
- Upward & downward tilt mechanism





GALESTAR FARRATA BLACK-SILVER

ALSO AVL. MODELS

GALESTAR FARRATA NEO BLACK-SILVER GALESTAR OSCILLATING FARRATA BLACK-SILVER

TECHNICAL SPECIFICATIONS

Sweep
in mmPower Input
in WattsSpeed
in RPMAir Delivery
in CMM5001401400120

Features



Heavy-duty capacitor -type motor for a powerful performance



Aerodynamically designed, well-balanced metal blades for excellent air delivery



Vibration-free operation



Heavy and large base for better stability



Telescopic arrangement for height adjustment



3-level
speed control
rotary switch

- Powder-coated finish for 100% corrosion resistance and durability for longer life
- Available in oscillating and non-oscillating models







BLACK-CHROME

BLACK-SILVER

TECHNICAL SPECIFICATIONS

Sweep	Power Input	Speed	Air Delivery
in mm	in Watts	in RPM	in CMM
450	90	1350	100

Features



Powerful and energy-efficient 100% copper motor



Aerodynamically designed aluminium blades for high air thrust and low noise



Autothermal overload protection



Smooth wide-angle oscillation




Telescopic arrangement for height adjustment



3-speed controlrotary switch

- Unique and elegant large base design for better stability and enhanced aesthetic look
- Available in premium black powder coating and chrome finish guard with lacquer
- Upward and downward tilt mechanism

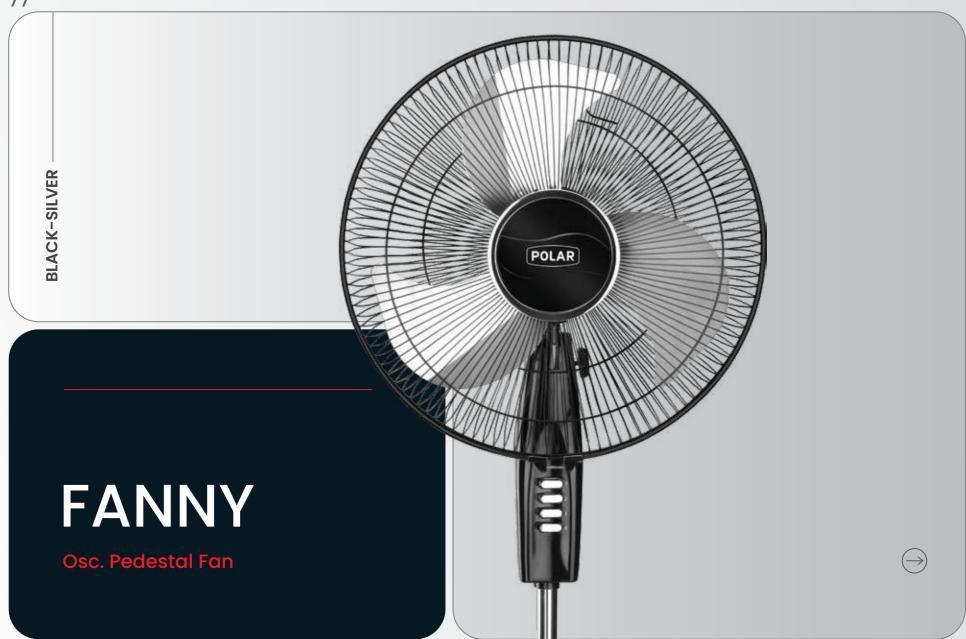



BLACK-SILVER

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Jerk-free oscillation



Strong and large metal base for better stability



Aerodynamically balanced aluminium blades for high air thrust



Childproof guard



3-speed push-button switch control

TECHNICAL SPECIFICATIONS


Sweep in mm 400 Power Input in Watts 65 Speed in RPM 1350

Air Delivery in CMM

72

 Upward and downward tilt mechanism

• Telescopic arrangement for height adjustment

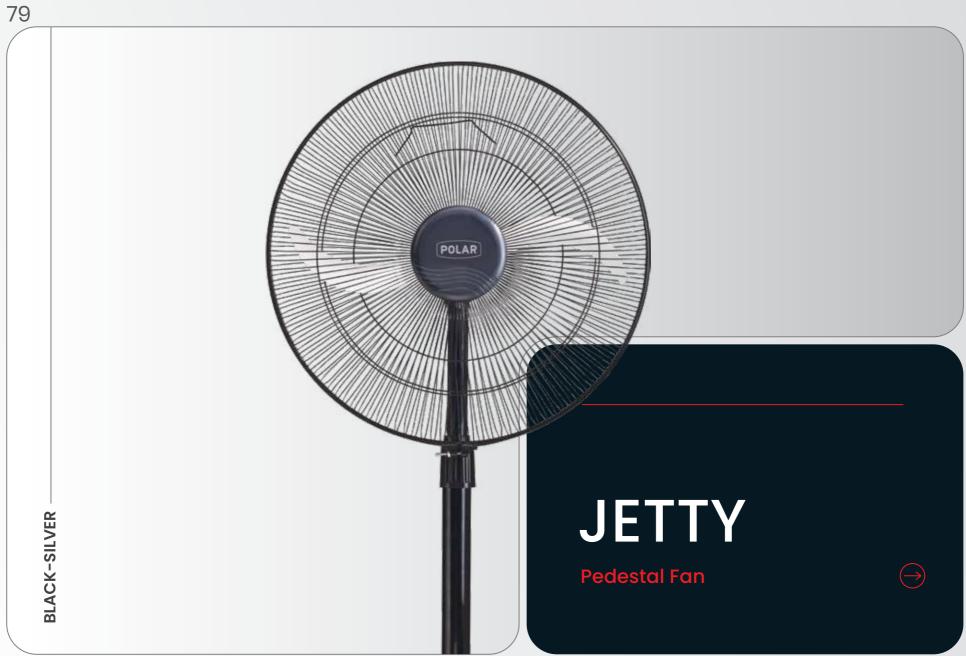



BLACK-SILVER

Features



Powerful and high-speed 2-pole motor



High air delivery and throw



Round metal base for better stability



Aerodynamically designed aluminium cast knife blades for high air thrust




Childproof Guard


TECHNICAL SPECIFICATIONS

Sweep in mm 450 Power Input in Watts Speed in RPM 2500 Air Delivery in CMM

80

• Telescopic arrangement for height adjustment

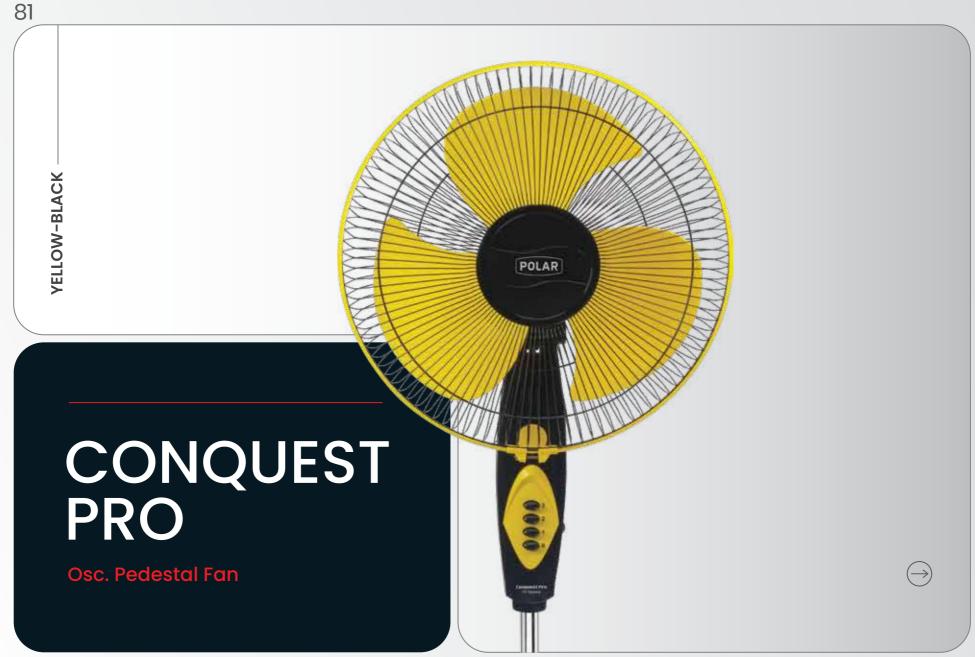

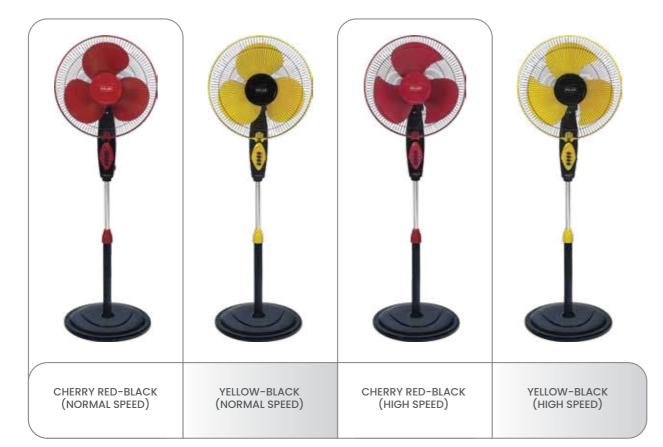

TECHNICAL
SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM	
Normal Speed				
400	65	1350	72	
High speed				
400	110	2200	95	

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Jerk-free oscillation



Strong and wide base for stability



Telescopic arrangement for height adjustment



Excellent air thrust and air delivery



Silent operation



3-speed push-button switch control

• Attractive colour combination for better aesthetics







WHITE-PURPLE (HIGH SPEED)

WHITE-PURPLE (NORMAL SPEED)

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Jerk-free oscillation



Strong and large base for stability



Excellent air thrust and air delivery



Silent operation




3-speed push-button switch control

TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM	
Normal Speed				
400	65	1350	72	
High speed				
400	110	2200	95	

• Telescopic arrangement for height adjustment

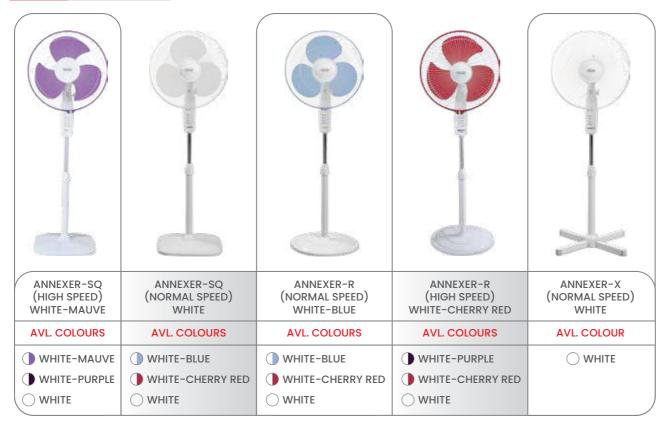

TECHNICAL SPECIFICATIONS

Model Name	Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM	
Normal Speed					
Annexer-R & SQ Annexer-X	400 400	65 65	1350 1350	72 72	
	High Speed				
Annexer-R & SQ	400	110	2200	95	

*Annexer-R & Annexer-SQ available in regular and high speed variants

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Jerk-free oscillation



Telescopic arrangement for height adjustment



Excellent air thrust and air delivery




Silent operation



3-speed push-button switch control

 Strong and large base for stability (cross-base model comes with stable base bracket design)



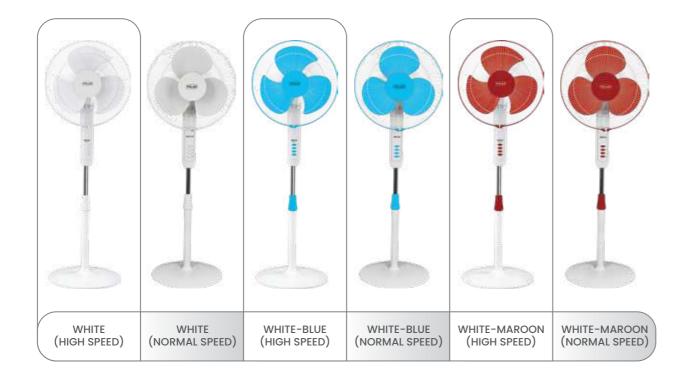

TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM	
Normal Speed				
400	55	1350	72	
High Speed				
400	110	2200	95	

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Jerk-free oscillation



Strong & large base for better stability



Telescopic arrangement for height adjustment



Silent operation



Childproof guard



3-speed push-button switch control

• Excellent air thrust & air delivery



BLACK-SILVER

Features



Powerful 100% copper motor



Full metal construction



Autothermal overload protection



Wide-angle oscillation



Upward and downward tilt mechanism



Pull cord mechanism for 3-speed control



Aerodynamically designed aluminium blades for high air thrust and delivery

TECHNICAL SPECIFICATIONS

Sweep in mm 450 Power Input in Watts 90

Speed in RPM 1350 Air Delivery in CMM

100

 Available in premium black powder coating and chrome finish guard with lacquer





BLACK-SILVER

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Jerk-free oscillation



Silent operation



Upward and downward tilt mechanism



Aerodynamically balanced aluminium blades for high air thrust




Pull cord mechanism for oscillation and 3-speed control along with ON/OFF

TECHNICAL SPECIFICATIONS

Sweep in mm 400 Power Input in Watts 65 Speed in RPM 1350 Air Delivery in CMM

72

• Extra ribs on the front and back guard for enhanced safety




WHITE-BLUE (NORMAL SPEED)



WHITE-MAROON (NORMAL SPEED)



WHITE (NORMAL SPEED)



WHITE-BLUE (HIGH SPEED)



WHITE-MAROON (HIGH SPEED)



WHITE (HIGH SPEED)

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Jerk-free smooth oscillation



Silent operation



Upward and downward tilt mechanism



Aerodynamically balanced blades for high air delivery



Pull cord for oscillation & speed control

TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM	
Normal Speed				
400	65	1350	72	
High Speed				
400	110	2200	95	

- Sleek & stylish aesthetic look
- 3-speed rotary switch for speed control





YELLOW-BLACK (HIGH SPEED)

CHERRY RED-BLACK (HIGH SPEED)





YELLOW-BLACK (NORMAL SPEED)

CHERRY RED-BLACK (NORMAL SPEED)

TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM	
Normal Speed				
400	65	1350	72	
High Speed				
400	110	2200	95	

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Jerk-free smooth oscillation



Silent operation



Excellent air thrust and air delivery



Pull cord for oscillation and 3-speed control

Attractive colour combinations





WHITE-PURPLE (NORMAL SPEED)

WHITE-PURPLE (HIGH SPEED)

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Jerk-free oscillation



Silent operation



Excellent air thrust and air delivery

TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM		
	Normal Speed				
400	65	1350	72		
High Speed					
400	110	2200	95		

• Pull cord for oscillation and 3-speed control



Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Jerk-free oscillation



Upward and downward tilt mechanism



Aerodynamically designed high-grade polymer blades for maximum air delivery



Pull cord for oscillation and 3-speed control

TECHNICAL SPECIFICATIONS

Sweep in MM	Power Input in Watts	Speed in RPM	Air Delivery in CMM		
Normal Speed					
400	65	1350	72		
	High Speed				
300 400	95 110	2200 2200	72 95		

 Extra protection against corrosion with powder-coated guard and polymer ring **BLACK-SILVER**


GALESTAR FARRATA

Osc. Wall Fan



YEAR

WARRANTY

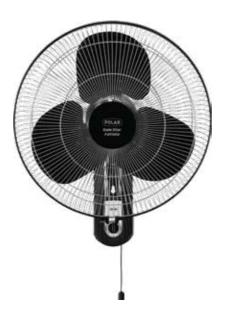

BLACK-SILVER OSC. WALL

TECHNICAL SPECIFICATIONS

Sweep	Power Input	Speed	Air Delivery
in mm	in Watts	in RPM	in CMM
500	140	1400	120

Features



Heavy-duty double ball bearing motor for better energy efficiency & durability



Pull cord for 3-speed control and on/off



Vibration-free operation



Smooth wide-angle oscillation



Unique & strong wall stand design

- Aerodynamically designed and well balanced broad 3-leaf metal blades for excellent air thrust
- Sturdy close wire mesh guard for extra safety
- Metal construction
- Upward and downward tilt mechanism
- Powder-coated finish for corrosion resistance and longer life







WHITE-PURPLE (HIGH SPEED)

WHITE-PURPLE (NORMAL SPEED)

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Jerk-free oscillation



Strong and large base for better stability



Silent operation



Excellent air thrust and air delivery

TECHNICAL SPECIFICATIONS

Sweep in MM	Power Input in Watts	Speed in RPM	Air Delivery in CMM
	Normal	Speed	
400	65	1350	72
	High S	peed	
400	110	2200	95

• 3-speed push-bottom switch control





WHITE-BLUE (NORMAL SPEED)

WHITE-MAUVE (NORMAL SPEED)





WHITE-BLUE (HIGH SPEED)

WHITE-MAUVE (HIGH SPEED)

TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM
	Normal	Speed	
400	65	1350	72
	High S	peed	
400	110	2200	95

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Smooth wide-angle oscillation



Strong and large base for better stability



Silent operation




Upward and downward tilt mechanism



3-speed push-button switch control

- Extra protection against corrosion with powder-coated guard and polymer ring
- Aerodynamically designed high-grade polymer blades for maximum air delivery

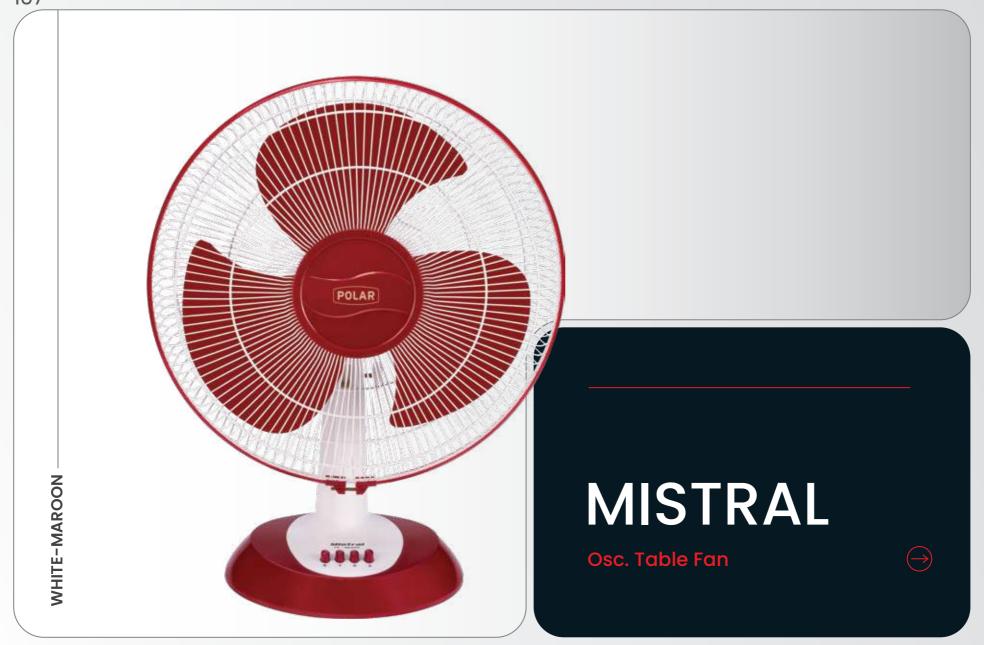



WHITE-BLUE (NORMAL SPEED)



WHITE-MAROON (NORMAL SPEED)



WHITE (NORMAL SPEED)



WHITE-BLUE (HIGH SPEED)



WHITE-MAROON (HIGH SPEED)



WHITE (HIGH SPEED)

Features



Powerful and energy-efficient 100% copper motor



Autothermal overload protection



Smooth wide-angle oscillation



Strong and large base for better stability



Upward and downward tilt mechanism



3-speed push-button switch control

TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMM
	Norm	al Speed	
400	65	1350	72
	Hig	Speed	
400	110	2200	95

 Aerodynamically designed high-grade polymer blades for maximum air delivery

DYNAMIC DYNAMIC







WHITE-GREY (HIGH SPEED)

Features



Energy-efficient & powerful motor for durability



Scientifically profiled high-grade polymer blades for high air thrust



3-speed control rotary switch



Extra protection against corrosion with powder-coated guard and polymer ring

TECHNICAL SPECIFICATIONS


Sweep in mm 300 Power Input in Watts Speed in RPM 2300 Air Delivery in CMM

80

 2-in-1 advantages of wall mounting & table/desktop usage **BLACK-CHROME**

STORMY NEO

Multi-utility Fan

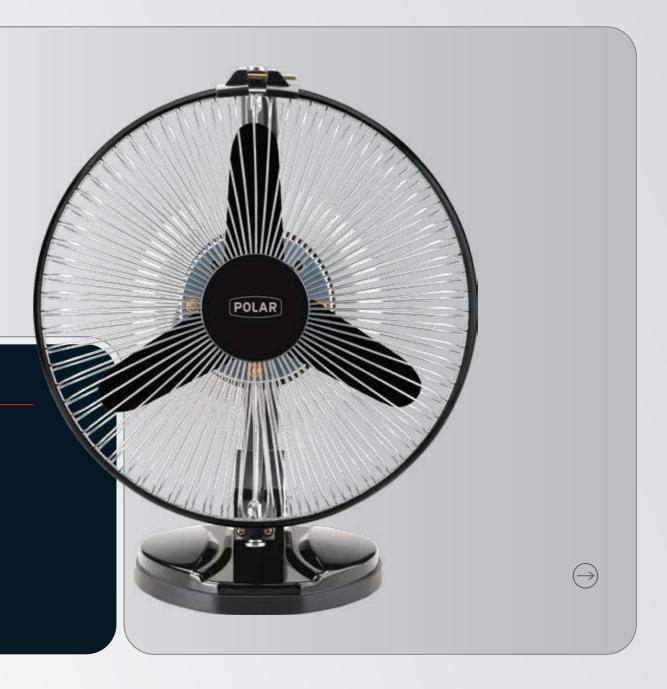



BLACK-CHROME (HIGH SPEED)

Features



Heavy-duty 100% copper motor for durability



2800 RPM for high air thrust



Novel rocker arrangement to swivel by 360° horizontally & 180° vertically

TECHNICAL SPECIFICATIONS

Sweep in mm 230

Power Input in Watts 45

Speed in RPM 2800

Air Delivery in CMM 26

Air Velocity in M/Min

268

 2-in-1 advantages of wall mounting & table/desktop usage





WHITE

Features



Heavy-duty 100% copper motor



Autothermal overload protection



3-speed operation



Oscillation with synchronous motor

TECHNICAL SPECIFICATIONS

Sweep in mm 230 Power Input in Watts Speed in RPM 2600 Air Delivery in CMM

28

 2-in-1 advantages of wall mounting & table/desktop usage



WHITE

Features



100% copper motor for durability



All-round air delivery with rotating grille



Powerful motor for high air delivery



High-grade polymer revolving grille



Overheat protection



Aerodynamic blades for faster speed and high air delivery

TECHNICAL SPECIFICATIONS


Sweep in mm 300 Power Input in Watts Speed in RPM 2100 Air Delivery in CMM

58

 2-in-1 advantages of wall mounting & ceiling usage



INDOORS ALWAYS

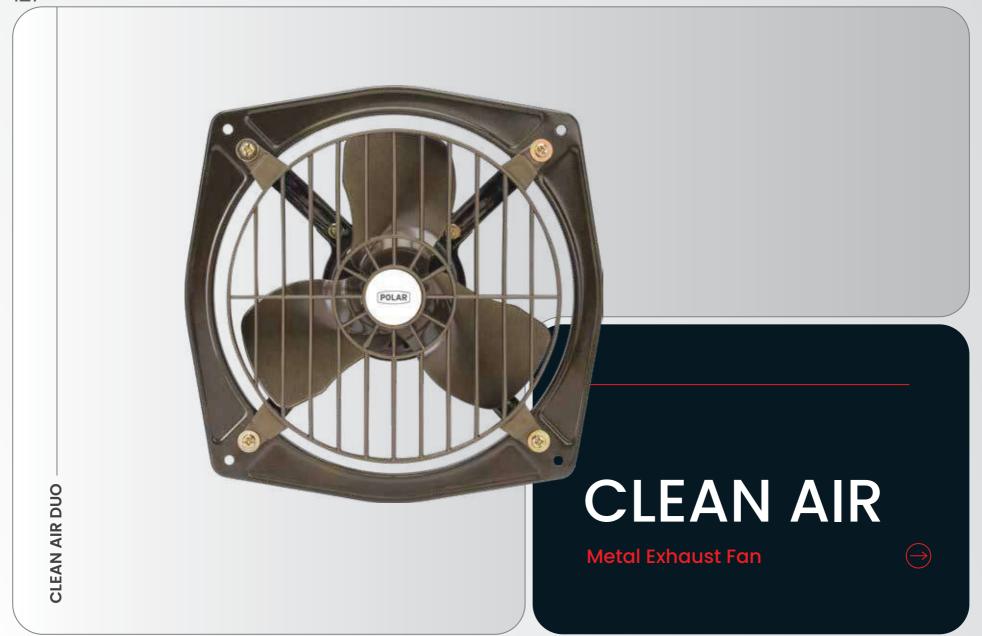



CLEAN AIR HIGH-SPEED & HIGH-SPEED NEO



CLEAN AIR METAL EXHAUST



CLEAN AIR DUO



CLEAN AIR DELUXE



CLEAN AIR SELECT DUO



CLEAN AIR SELECT/SELECT NEO

TECHNICAL SPECIFICATIONS

Model Name	Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMH
Clean Air Select	150/230/300	40/42/65	2600/1350/1300	550/750/1750
Clean Air Select Neo	230/300	45/80	1350/1350	750/1750
Clean Air High-speed	150/230	55/60	2600/2650	550/950
Clean Air Metal Exhaust	230/300	40/50	1350/1300	520/1250
Clean Air Duo	230	60	2650	950/900
Clean Air High-speed Neo	230	60	2600	950
Clean Air Deluxe	230/300	40/65	1300/1270	650/1250
Clean Air Select Duo	230	40	1350	750/550
Clean Air Select Duo	300	65	1300	1750/1050

Features



Robust motor for powerful performance and longer life



Metal/resin blades with safety guard (optional) for longer life



Clean Air Duo & Clean Air Select Duo rotate in both clockwise & anti-clockwise directions



High-speed model with a powerful motor and high air suction



Powder-coated finish

- Clean Air Select has double ball bearings and heavy-duty 4-leaf blades, and it is mounted on an aluminium carrier and powder-coated metallic coloured carrier
- Clean Air Deluxe and Clean Air Metal Exhaust are available with a non-capacitor motor
- Ideal for Kitchens, Bathrooms, Restaurants and also for low-end industrial use (for selected models)

CLEAN AIR PASSION-VH

CLEAN AIR

POLAR

CLEAN AIR

Plastic Ventilating Fan





CLEAN AIR PASSION*



CLEAN AIR
PASSION NEO*



CLEAN AIR
PASSION BLDC*



AXIAL FLOW (AF)*



AXIAL FLOW PLUS



AXIAL FLOW NEO



CLEAN AIR-VH**

*AVAILABLE COLOURS:

- O WHITE
- IVORY
- BLACK

**AVAILABLE COLOURS:

- WHITE
- IVORY
- WOOD FINISH

•	Self-open and close
	shutter to prevent dust and
	foreign materials (on select
	models only)

Features

Robust motor for powerful performance and longer life

High-grade thermoplastic polymer body and blades

Powerful air

Lightweight rust-proof

Overheat protection

body

suction for fresh & odourless air

- Easy screw-less installation, can be mounted on glass/window panel
- Convenient removal of front shutter for easy cleaning (VH)
- Powerful & energy-efficient BLDC motor for low electricity consumption (BLDC model)

TECHNICAL SPECIFICATIONS

Model Name	Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMH	
Clean Air Passion- Axial Flow	100/150/200	18/24/25	2500/1800/2000	90/250/350	
Axial Flow Plus & Neo	100/150/200	18/24/25	2500/1800/2000	90/250/350	
Clean Air Passion-VH	100/150	18/24	2500/1800	85/220	
Clean Air Passion Neo	150/200/250	32/35/37	1350/1300/1250	300/500/750	
Clean Air Passion BLDC	150/200/250	6/12/14	1350/1350/1350	250/500/750	
		Normal Speed			
Clean Air Passion	150/200/250	32/35/37	1350/1300/1250	300/500/750	
High Speed					
Clean Air Passion	150/200	50/65	2500/2100	500/750	

COMFORT INSTERNMENT CORFER CORFER









BLACK-SILVER

BLACK-SILVER

TECHNICAL SPECIFICATIONS

Sweep	Power Input	Speed	Air Delivery	Min. Peak Air
in mm	in Watts	in RPM	in CMM	Velocity in M/Min
450	100	1400	150	250
600	180	1400	280	250
750	250	1400	370	245

Features



Heavy-duty and powerful 100% copper motor



Heavy and robust base for better stability



Powder-coated paint with a metallic finish protects the fan from corrosion



Aerodynamically designed aluminium blades for high air delivery



Double ball bearings for longer life

- Heavy-duty and powerful motor for optimum performance even at low voltage
- Precision-built oscillating mechanism with an indexing option and 90° oscillation
- Performance generally conforms to IS-2997-1964 with up-to-date amendments

WINDPOWER NEO

WINDPOWER & WINDPOWER NEO

Heavy-duty Metal Ventilating Fan







Windpower Neo

TECHNICAL SPECIFICATIONS

Sweep in mm	Power Input in Watts	Speed in RPM	Air Delivery in CMH (under free airflow condition)
300	82	1400	1900
300	50	900	1270
380	150	1400	3600
380	90	900	2220
450	370	1400	6800
450	132	900	4340
600	500	900	10450

Features



Powerful and efficient robust motor with double ball bearings for longer life



Autothermal overload protection



ISI approved



Anti-corrosive powder-coated glossy finish

- Designed to effectively combat pollution and remove smoke, dust and other pollutants, keeping the workplace clean and fresh
- Available in IP-55 degree of enclosure for protection against dust and water ingress
- Dynamically balanced heavy-duty impeller
- Available to suit single-phase and 3-phase supply







COOLER FAN

Sweep

MINI SUBMERSIBLE PUMP

H. P.

Features



Powerful and energy-efficient capacitor-type motor



Max.

Bronze bush with adequate lubrication for enhanced life

TECHNICAL SPECIFICATIONS

in mm	in Watts		RPM		AMP.	
300 400 450	105 150 350	2700 1400 1400		1/10 1/7 1/4	0.5 0.7 1.7	
	Mir	ni Subme	ersible Pu	mp		
Туре	Power Consumption in Watts	Maximum Head		Maximum Flow	Max. Cooler Height Recommended	
Regular Jumbo	18 38	1.8 mtrs. 2.8 mtrs.		800 LPH 1200 LPH	1.2 mtrs. 1.8 mtrs.	
	Cooler Fan					
Sweep in mm	Power Input in Watts			Speed n RPM	Air Delivery in CMH	
500	150			1400	6000	

Cooler Motor

Speed


Power Input

- Broadleaf in aluminium sheet, scientifically designed and mounted on MS carrier to make sturdy construction and produce high air delivery
- Essential gadget for room/desert coolers used in domestic/commercial establishments for maximum cooling
- Mini submersible pump in a normal and jumbo model takes care of high water flow with a higher delivery head

INSTALLATION DIAGRAM


CLEAN AIR PASSION

Dimensional Guidelines for Installation




A (Sweep)	В	С	D	Е	F	G	н
150	243	243	175	175	32	84	70
200	293	293	242	242	42	89	58
250	345	345	292	292	42	89	71

Installation Instruction

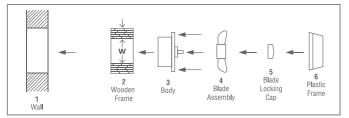

Connection Diagram




Wooden Frame Cutout Sizes

177 × 177 (for 150 mm) 245 × 245 (for 200 mm)


295 × 295 (for 250 mm)

AXIAL FLOW

Cutout Size Guidelines



Front View




Clean Air Axial Flow Ventilating Fan - Detailed Chart

All sizes are in mm

Sweep	Α	В	С	D	E
100	152	110	90	12	152
150	180	148	90	12	180
200	222	185	108	12	222

CLEAN AIR PASSION-VH


Installation & Maintenance Instructions

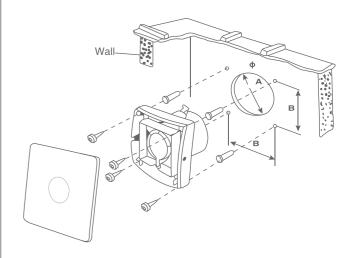

Sweep	Α	В
100 mm	110	115
150 mm	150	146
200 mm	185	180

Wiring Instruction & Diagram

Connect Black & Red Wires to Supply 230 V, AC, 50 Hz, 1-Ph

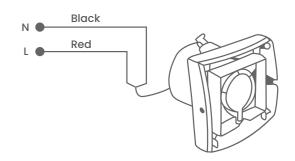

GENERAL GUIDELINES FOR SELECTION OF CEILING FANS & DOMESTIC EXHAUST FANS

Model Size	Sweep	Suitable for Room Size
Ceiling Fan	600 mm	For Small Shops, Cabins & Toilets
Ceiling Fan	900 mm	2.1 x 3 mtrs.
Ceiling Fan	1050 mm	3 x 3 mtrs.
Ceiling Fan	1200 mm	3.7 x 4 mtrs.
Ceiling Fan	1400 mm	4.3 x 5 mtrs.
Domestic Exhaust Fan	150/200 mm	2 x 2 x 2.8 mtrs.
Domestic Exhaust Fan	230 mm	2.4 x 2.4 x 2.8 mtrs.
Domestic Exhaust Fan	300 mm	3 x 2.4 x 2.8 mtrs.

FOR LARGE HALLS, AUDITORIUMS AND OFFICES, INSTALL TWO OR MORE CEILING FANS WITH A SPACING SPECIFIED BELOW

Sweep of Fan	Centre Distance
900 mm	2 mtrs.
1050 mm	2.1 mtrs.
1200 mm	2.4 mtrs.
1400 mm	3 mtrs.



Makes life easy

BRANCHES

SOUTH

Chennai | Madurai | Kochi | Bengaluru | Vijayawada | Hyderabad

EAST

Kolkata | Bhubaneswar | Guwahati | Patna | Ranchi

NORTH

Delhi NCR | Chandigarh | Jaipur | Kanpur | Ghaziabad | Dehradun | Varanasi

WEST & CENTRAL

Mumbai | Nagpur | Ahmedabad | Indore | Jabalpur | Raipur

Note: The technical performance figures are rated values, based on a voltage range of 220-240V (230V rated), 50Hz, single phase, AC Supply. These are subject to manufacturing tolerance. Due to constant product upgradation, the models shown in the catalogue may undergo changes in features, performance or looks without prior notice. Model colours shown in the catalogue are indicative and may vary from the actual product colours. All ceiling fan models conform to IS:374-2019 and IS:302-2-80 safety norms, and all table, pedestal, and wall fans conform to IS:302-2-80 safety norms. The ceiling fans do not come with regulators.

POLAR ELEKTRIC LTD.

CIN: U31909WB2004PLC100818 Regd. Off.: Unit No. 8B & 8C, 8th Floor 23 Circus Avenue, Kolkata 700 017 West Bengal, India P: (033) 6629 1829

customercare@polarelektric.com info@polarelektric.com www.polarelektric.com If PolarIndia

